


1.Package Dimension Unit: mm

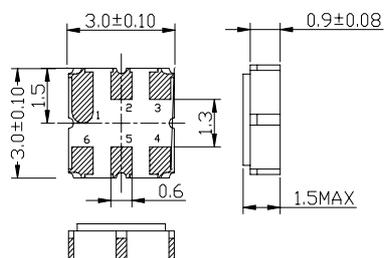

Pin No.	Function
2.	Input
5.	Output
Other	Ground

2.Electronic Characteristics

Electrostatic Sensitive Device (ESD)

Item	Frequency (MHz)	Specification
Center Frequency (fo)	1842.5	
Pass-band Width	75	
Insertion Loss	1805 ~ 1815	3.3 dB max. (15 to +70)
		3.7 dB max. (-20 to 15)
	1815 ~ 1870	3.0 dB max.
	1870 ~ 1880	3.6 dB max.
Stop-band Attenuation	0 ~ 1720	20 dB min.
	1720 ~ 1765	25 dB min.
	1765 ~ 1785	8 dB min.
	1920 ~ 1980	15 dB min.
	1980 ~ 2410	17 dB min.
	2410 ~ 3120	20 dB min.
	3120 ~ 4000	17 dB min.
Return Loss	1805 ~ 1880	6 dB min.