


1.Package Dimension Unit: mm

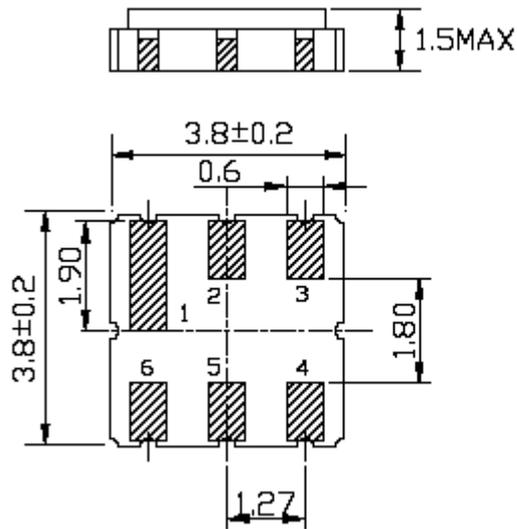

Pin No.	Function
2.	Input
5.	Output
Other	Ground

2.Electronic Characteristics

Electrostatic Sensitive Device (ESD)

Item	Frequency (MHz)	Specification
Center Frequency (fo)	446.0	
Passband Width	$fo \pm 2.0$	
Insertion Loss	$fo \pm 2.0$	4.5 dB max.
Ripple Deviation	$fo \pm 2.0$	2.0 dB max.
Stop Band Suppression	$fo-100 \sim fo-40.8$ $fo+40.8 \sim fo+100$	55 dB min. 55 dB min.
Terminating Impedance		150 Ω // 0pF