


1.Package Dimension Unit: mm

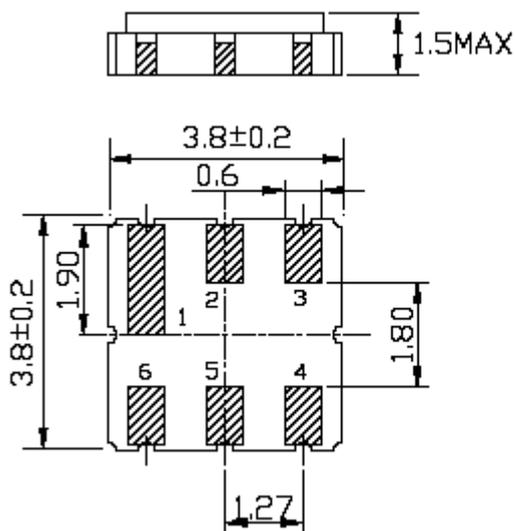

Pin No.	Function
2.	Input
5.	Output
Other	Ground

2.Electronic Characteristics

Electrostatic Sensitive Device (ESD)

Item	Frequency	Specification
Center Frequency (fo)	868.3 MHz	
Pass Band	868.1 ~ 868.5 MHz	
Insertion Loss	868.1 ~ 868.5 MHz	2.4 dB max.
Ripple Deviation	868.1 ~ 868.5 MHz	0.3 dB max.
Rejection	0 ~ 300.0 MHz 300.0 ~ 856.5 MHz 856.5 ~ 859.5 MHz 876.5 ~ 882.0 MHz 882.0 ~ 1500.0 MHz 1500.0 ~ 2600.0 MHz	45 dB min. 40 dB min. 15 dB min. 15 dB min. 48 dB min. 40 dB min.
Temperature Coefficient of		-31.0 ppm/K
Input Impedance		50 Ω
Output Impedance		50 Ω