


1.Package Dimension Unit: mm

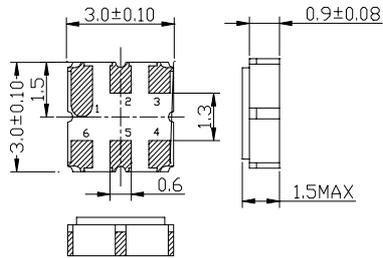

Pin No.	Function
2.	Input
5.	Output
Other	Ground

2.Electronic Characteristics

Electrostatic Sensitive Device (ESD)

Item	Frequency	Specification
Center Frequency (fo)	915 MHz	
3dB Pass band Width	$f_o \pm 3.5$ MHz	
Insertion Loss	$f_o \pm 3.5$ MHz	4.5 dB max.
Ripple Deviation	$f_o \pm 3.5$ MHz	2.0 dB max.
Stop Band Suppression	$f_o - 45$ MHz ~ $f_o - 41$ MHz $f_o - 23$ MHz ~ $f_o - 20$ MHz $f_o + 20$ MHz ~ $f_o + 23$ MHz $f_o + 41$ MHz ~ $f_o + 46$ MHz	40 dB min. 30 dB min. 20 dB min. 40 dB min.
Terminating Impedance		$50 + j57.4 \Omega$