


1. Package Dimension Unit: mm

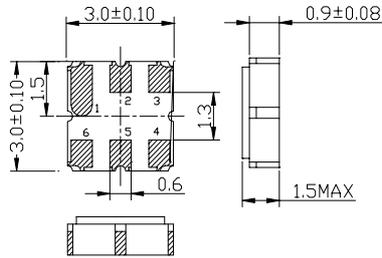

Pin No.	Function
2.	Input
5.	Output
Other	Ground

2. Electronic Characteristics

Electrostatic Sensitive Device (ESD)

Item	Frequency (MHz)	Specification
Center Frequency (fo)	942.5	
Pass-band Width	35	
Attenuation	0 ~ 880	20 dB min.
	880 ~ 905	20 dB min.
	905 ~ 915	15 dB min (-35°C to 35°C) 7 dB min. (35°C to 85°C)
	925 ~ 935	3.0 dB max. (15°C to 85°C) 3.5 dB min. (-35°C to 15°C)
	935 ~ 960	3.0 dB max.
	980 ~ 1005	20 dB min.
	1005 ~ 1080	20 dB min.
	1080 ~ 2400	20 dB min.
	2400 ~ 3120	10 dB min.
	925 ~ 960	6dB (Return Loss Minimum)
Terminating Impedance		50 Ω // 0nF